

PNEUMATIC SKINNER WITH PLATFORMS

The pneumatic skinner machine with platforms is based on a pneumatic drum skinning machine. It works on the basis of a rotating drum (individual drive) winding the leather. The rotational movement of the drum as well as the vertical up and down movement ensures that the skin is followed and enables the skin to be pulled off without risking the rupture of the spine. Two people are needed to operate the skinner properly. The pneumatic skinner operates on two mobile platforms that ride flush with the drum for proper skinning. The platforms are equipped with a sink and a knife sterilizer.

TECHNICAL SPECIFICATIONS

POWER SUPPLY: compressed air


PRESSURE: 0,6 bar

POWER: 3 kW (3 x 400V)


EFFICIENCY: up to 30 pieces per hour


SIZE: 3680 x 1200 x 4790 mm


WEIGHT: 850 kg

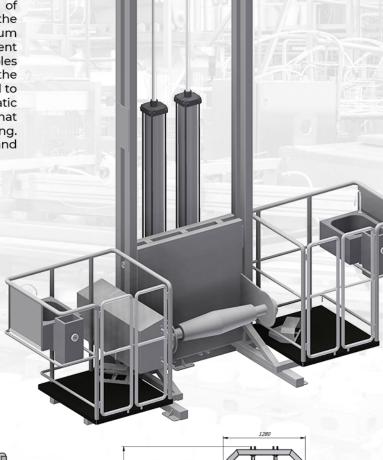

SLAUGHTER AND CUTTING







www.nirotech.pl

Zakład produkcyjny nr 1: Dąbrowskiego 40, 43-602 Jaworzno Zakład produkcyjny nr 2: Jaworowa 14, 41-208 Sosnowiec